



ROCK BLASTING

» ROCK SOLID RELIABILITY IN EMULSION EXPLOSIVE

MINING AND MINERALS

Large scale metal and coal mining as well as quarrying widely use emulsion explosives for rock blasting. Typically, the highly insensitive water based explosives is mixed with ANFO to form a blasting explosive, moments before offloading in the blast holes.

PCM progressing cavity pumps are commonly found aboard explosives trucks allowing **RELIABLE ON-SITE MANUFACTURING** of the explosives.

- Low operating speeds to prevent air entrapment and cavitation
- Low shear technology
- Non-pulsating and constant flow at all pressures
- High pressure outputs
- High viscosity and high density capabilities
- Clear and smooth flow path






PERFORMANCES

› **PERFORMANCES (more upon request)**

- Flow rate: up to 100 m³/h
- Pressure: up to 52 bar

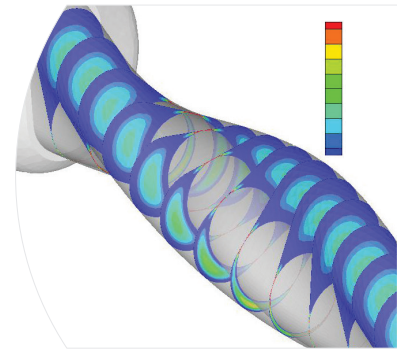


ADVANTAGES

› **MOINEAU TECHNOLOGY**

- Robustness for tough environment
- Solid particles handling: abrasion resistance
- Low shear technology: high shearing may increase emulsion sensitivity
- Volumetric accuracy

› **ECOMOINEAU™ PUMP**

- Standard visit holes on pump body to ease inspection
- Independent access to each wearing part
- Smaller pump body to avoid dead spaces
- Compact for easy integration- Hydraulic drives

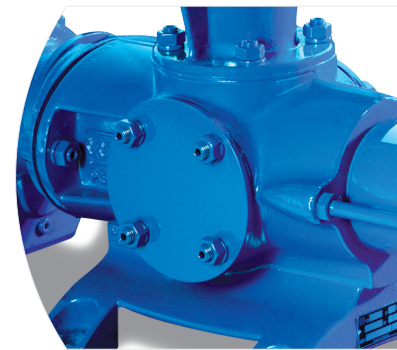

Standard visit holes
EcoMoineau™ M pump

OPTIONS


- Dry running prevention system
- Flow-meters
- Pressure switch
- Auger feed design



1C24S pump with hydraulic drive



› **PCM EcoMoineau™**

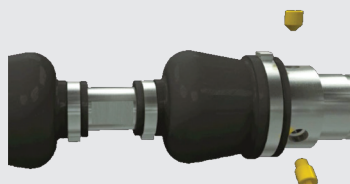

**3 screws to complete
maintenance**

**The shortest progressing
cavity pump on the market**